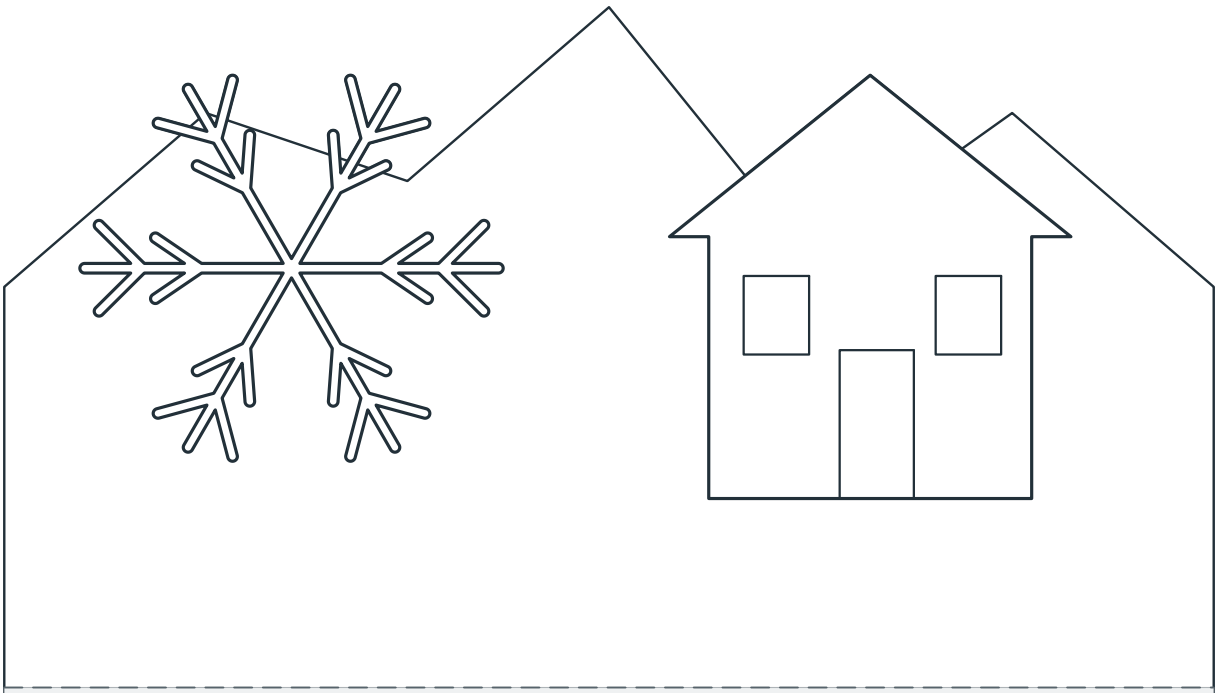
# Winter Warmth layered paper scene

ex2-1341 / LETTER / Back layer / 160 mm wide



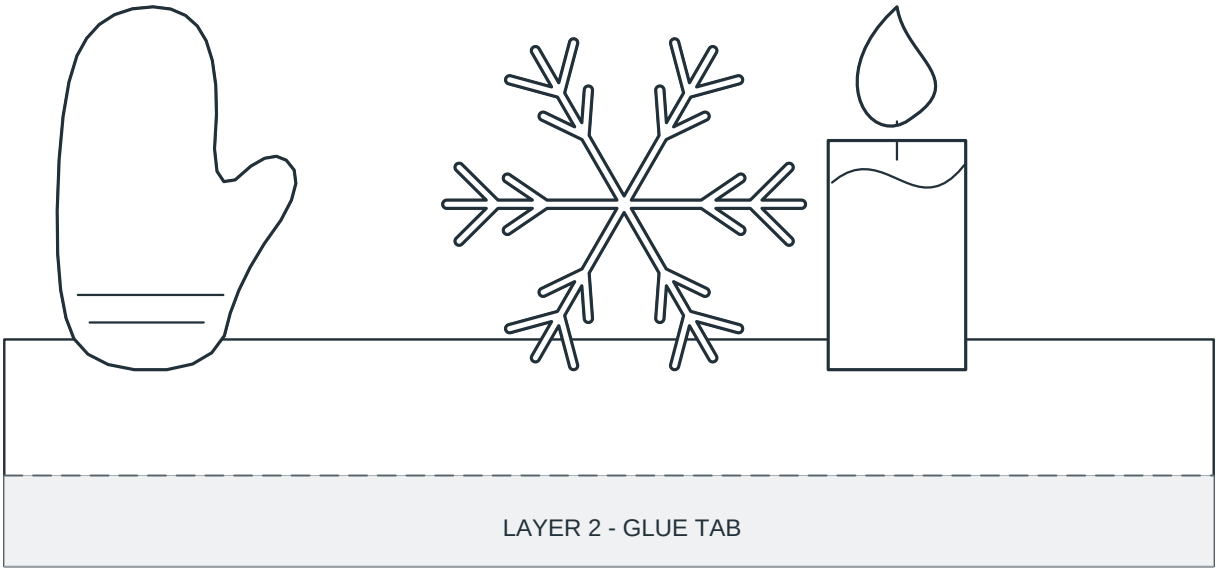

Cut outer contour only. Fold tab toward FRONT; printed side up.

50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

# Winter Warmth layered paper scene

ex2-1341 / LETTER / Middle layer / 160 mm wide



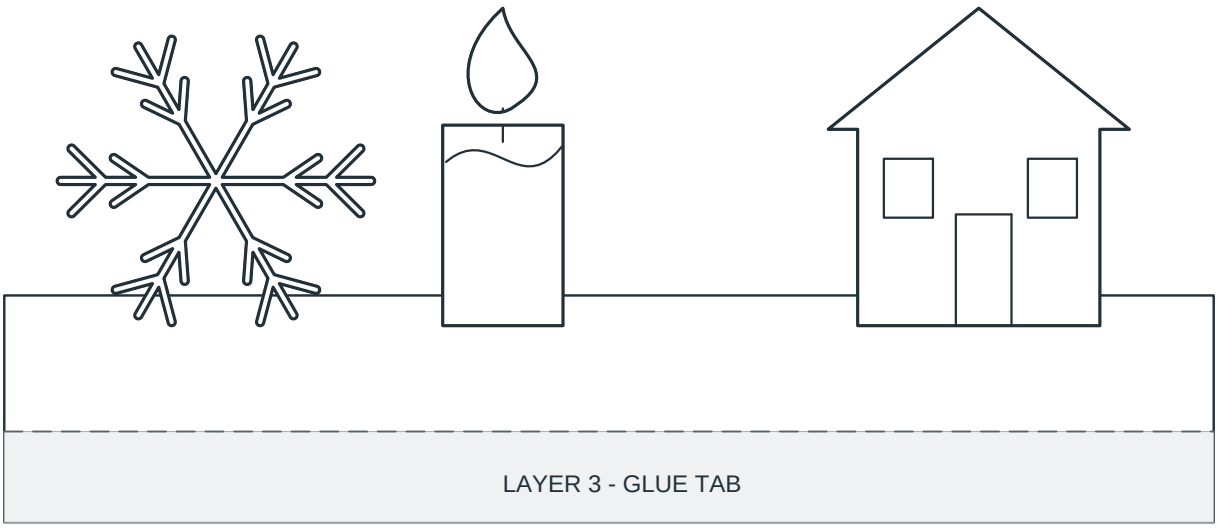

Cut main layer and separate flame. Use page 5. Fold tab toward FRONT.

50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

# Winter Warmth layered paper scene

ex2-1341 / LETTER / Front layer / 160 mm wide



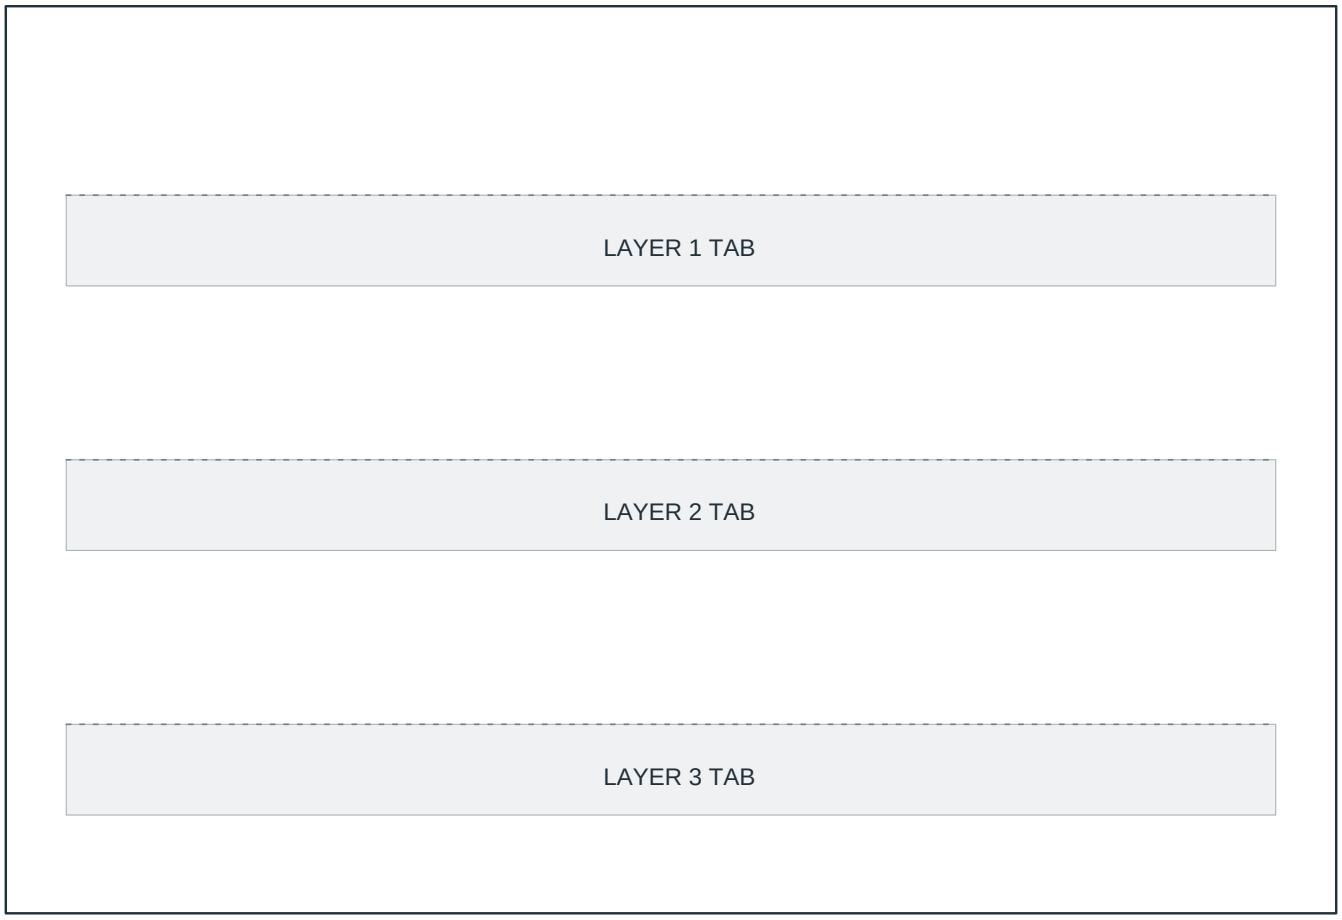

Cut main layer and separate flame. Use page 5. Fold tab toward FRONT.

50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

# Winter Warmth layered paper scene

ex2-1341 / LETTER / Base board / 176 x 120 mm




Front edge

50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

# Winter Warmth layered paper scene

ex2-1341 / LETTER / Instructions

**PURPOSE**
Three layer assemblies and a marked base. The middle and front flames are separate cut pieces joined with scrap backers. The supports remain visible behind the flame gaps.

**MATERIALS**
Paper, ruler, scissors, blunt scoring tool, paper adhesive and two scrap strips, each 3 x 15 mm; adult help with cutting. The printed layer tabs stay attached.

**HOW TO USE THESE PAGES**
1. Print all five pages at 100%. Check the 50 mm reference bar. Cut the back layer around its outside. Cut each middle/front main layer and its separate flame around their outside contours. Keep the interior drawing lines and full bottom tabs.

2. Use one placement guide at a time. Keep the guide intact. Lay the matching main layer and flame PRINTED SIDE DOWN, top upward. Match the candle top corners and the entire mirrored flame outline. Keep the gap shown.

3. Put adhesive on two 3 x 4 mm windows on one side of each backer, starting 0.5 mm from each end. Keep the middle 6 mm dry. Set the adhesive side against the blank backs, aligned with the blue strip in the gap, with the lower end 6 mm below the candle top. Keep the strip uncreased. Let the adhesive set as instructed before lifting the assembly.

4. Score each original dashed baseline. With the illustrations facing the base FRONT edge, fold each 12 mm tab toward FRONT. Its printed side faces up; its blank underside meets the base. Match the crease to the dashed band axis, and align the full 160 mm width.


5. Glue the blank tab undersides onto the existing shaded bands: layer 1 at 95 mm, layer 2 at 60 mm, layer 3 at 25 mm from FRONT. Let the adhesive set as instructed before moving the display.

**REVERSE PLACEMENT GUIDES - 1:1 / KEEP INTACT**

Pale blue: strip and dry middle. Orange: adhesive windows only.


Use one guide at a time. BLANK SIDE UP; top remains up.

**Middle / page 2**



Body continues below guide.

**Front / page 3**



Body continues below guide.

**LIMITS**
The 3 mm supports are visible in the gaps and beside the narrowing flame tips. This is digitally checked geometry; material strength, adhesive behavior and finished physical results are unassessed.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.

Use the paper edition that matches the printer tray.