
Corner pocket envelope

Solid: cut / dashed: fold / diagonal opening

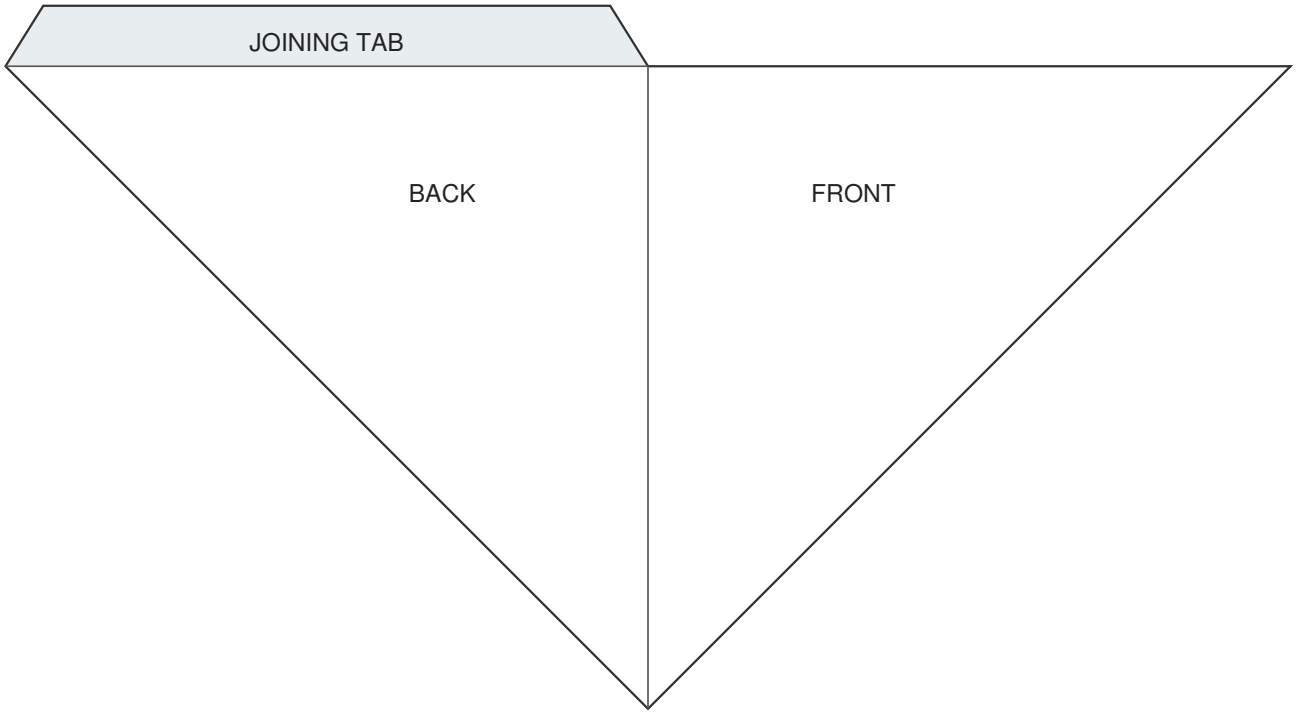

Keep the long diagonal edge open; join only the gray top tab.


Follow the fold sequence on page 2.

50 mm scale check | Measure after printing

Corner pocket envelope

Assembly guide / use with the matching net on page 1

FOLD SEQUENCE / SCHEMATIC, NOT A CUT PATTERN

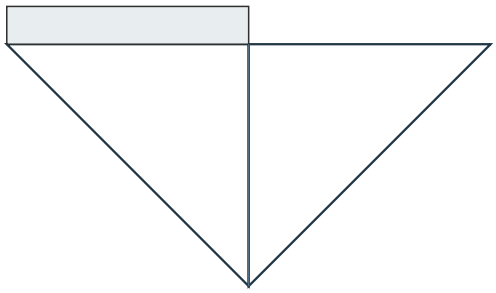

Fold FRONT onto BACK.

Shade = top joining tab only.

Diagonal edge stays open.

01 / PREPARE

Print at actual size; measure the 50 mm line. Trial a spare sheet and a scrap page corner first.

02 / CUT

Cut only the solid outside contour. Keep the narrow top joining tab attached. Dashed lines are folds.

03 / DRY-FOLD

Crease the vertical center and top-tab lines. Fold right FRONT onto left BACK; align top and long sloping edges.

04 / JOIN

Wrap the shaded top tab over the straight top edge and glue it to FRONT. Leave the long diagonal edge unglued as the opening.

05 / CHECK OPENING

The nominal triangular panels span 85 x 85 mm. Slide a scrap page corner through the diagonal opening without forcing a seam.

06 / FINISH

Let the tab join dry. Check that the pocket sits flat and that the page corner can be removed without tearing.

50 mm scale check | Measure after printing